


AYTM

GRASIL BY AYTM

FLOOR LED LAMP | TECHNICAL DOCUMENTATION



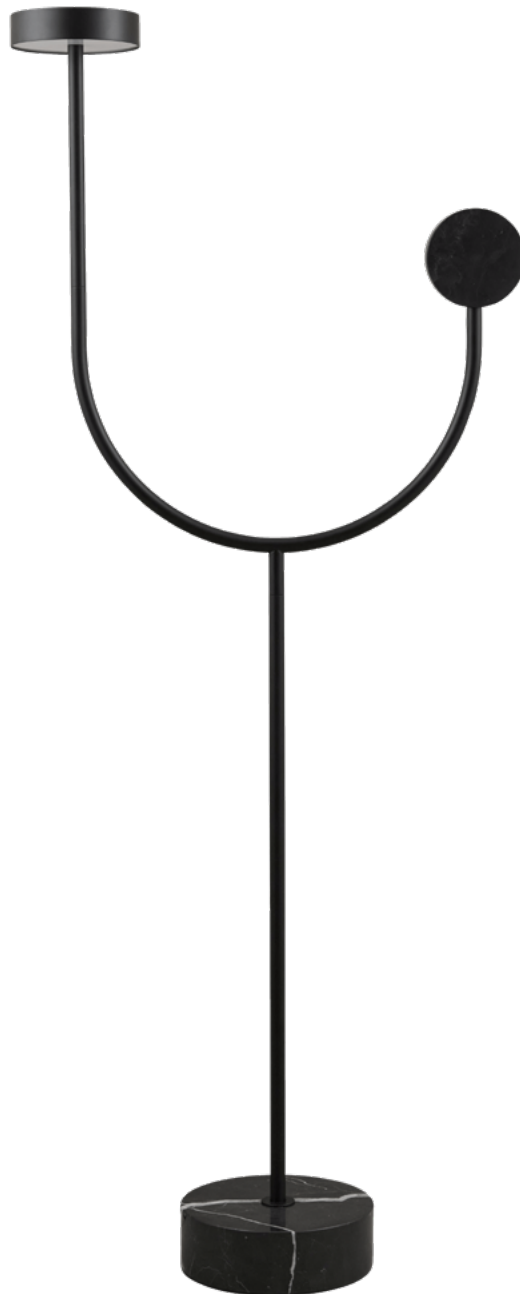


DESCRIPTION

With a solid marble base and exquisite bended metal tubes, GRASIL provides a unique and exclusive expression with an overwhelming elegance. The rounded geometrical elements, connected in an asymmetrical shape, gives the GRASIL LED lamps a sculptural appearance – and with the solidity from the marble, that stands in contrast to the light expression from the bended metal tubes, these lamps symbolizes the most beautiful symbioses of balance.

Let the light from GRASIL LED floor lamp brighten up any room in your home. The floor lamp is a sculptural masterpiece even with the lights off and gracefully illuminates your home creating a soft ambience in any room you choose to display it.

IMPORTER	Gran Living ApS Polensgade 15, 8000 Aarhus
BRAND	AYTM
PRODUCT ART. NO.	508769001085
PRODUCT TYPE	LED floor lamp
PRODUCT NAME	GRASIL
COLOURS	Black
DIMENSIONS	L51,5 x W20 x H127,6 cm
WEIGHT	13 kg
MATERIAL — LAMP	Steel with powder coating & Marble base
MATERIAL — CORD	Black textile
LED LIFESPAN	50.000 hours
COMPLIANT WITH	The lamp is CE (EU) & UKCA certified

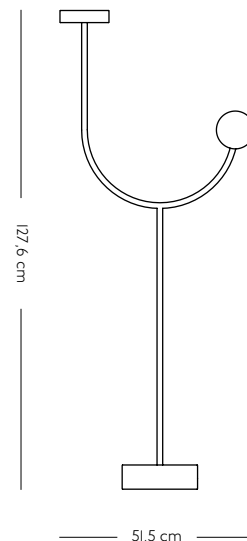

TECHNICAL SPECIFICATIONS

The following specifications are in accordance with the EU Regulation 2019 / 2015.

<i>LIGHTING TECHNOLOGY</i>	LED
<i>DIMMABLE</i>	No
<i>CONNECTION</i>	Wall socket
<i>LUMINOUS FLUX</i>	375lm
<i>COLOUR RENDERING INDEX</i>	>90
<i>ON-MODE POWER</i>	12W
<i>STANDBY POWER</i>	<0,5W
<i>NETWORK</i>	<0,5W
<i>STANDBY POWER ENERGY EFFICIENCY CLASS</i>	G
<i>SWITCH</i>	Foot step switch
<i>CABLE/CORD LENGTH</i>	2,5 m

CALCULATION

The Equation used for the calculation of the energy efficiency factor is the following:

$$\eta_{TM} = (\Phi_{use} / P_{on}) \times F_{TM} (lm/W).$$

Using above values and the factor $F_{TM}=0,926$ the equation looks as following – resulting in an energy efficiency **class of G**.

$$455lm/11W * 0,926(lm/W) = 38,3.$$

SPECIFIC PRECAUTIONS

The lamp needs to be assembled and can afterwards be connected to a power source with a plug. If the provided plug should not fit the wall socket use a safe and certified adapter.

Do not disassemble or remove the plug yourself if you are not a trained personal.